Part 1	1 –	Overview
--------	-----	----------

Assessment No.	COSHH 022	Assessment Date	December 2025		Review Period	12 Months
Assessor Name	Alan Sharman	Position	Health & Safety Advisor - SKA			
Product Name	Cherry Air Charm	Manufacturer Details		Bower		
Location of Use	Internally – building via electrical air freshener system.	Description of activity or work process that the product is used		Air fres	hener. Fitted into electric a	air freshener system.

#### Part 2 – Evaluation

Persons at Risk	Employees	✓	Contractors	✓	Visitors	✓	Public	✓	Other	<b>✓</b>
Route of Exposure	Inhalation	✓	Ingestion	✓	Skin Contact	<b>\</b>	Eye Contact	<b>√</b>	Injection	

### **Hazard Symbols**



















Explosive

Flammable

Oxidising

Corrosive

Acute toxicity

Hazardous to the environment

Serious health
Health hazard hazard

Gas under pressure

Hazard St	latemeni	ıs
-----------	----------	----

H412 Harmful to Aquatic Life with Long Lasting Effect 3

P281 Use Personal Protective Equipment as required, P312 If unwell, consult poison centre or physician, P501 Dispose of contents/container to hazardous or special waste collection site in accordance with local/regional/national or international regulations.


**Precautionary Statements** 

#### Part 3 - Control Measures

First Aid Measure	s
Inhalation	Remove casualty to fresh air; ensure rest and warmth. Seek medical advice.
Ingestion	NEVER INDUCE VOMITING. If conscious, give plenty of water. If necessary, seek medical advice.

Skin Contact	Clean areas affected with soap and plenty of water. Remove contaminated clothing, to be washed thoroughly before re-using.						
Eye Contact	Wash out eye thoroughly with plenty of water until irritation subsides. Consult an eye specialist/ophthalmologist.						
Injection	Nil						
General	Nil						
Fire Precautions	Extinguishing media: to suit local surroundings (e.g. water spray, foam, carbon dioxide, dry powder.  Special hazards: non-combustible, non-flammable. Carbon and metal oxides may be released in a fire.  Advice for fire fighters: Wear self-contained breathing apparatus if necessary.  Spillage (accidental release)  Avoid generation of dust. Use suitable protective equipment. Do not allow to get into waste water or waterways; if this occurs, inform the relevant water authority at once.  Avoid dry sweeping; use water spraying or vacuum cleaning systems to prevent airborne dust generation. Label container and dispose of as prescribed.						
Handling	Handle in accordance with good hygiene and safety practice. Avoid generation of dust.  Storage  Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials						
Workplace Expos	ure Limits (WEL)		•				
	Ingredient	8-hour (long	term exposure limit)	15-minute (short te	erm exposure limit)		
Dipropylene glycol	monomethyl ether	50 ppm	308 mg/m <sup>3</sup>	-	-		
Active Ingredients	s (if not identified with a WEL)	<u> </u>					
Benzaldehyde							
Diethyl malonate							
2-Tert-Butlcycohex	yl acetate						
(R)-P-Mentha-1,8-	Diene						
(K)-P-IVIENTNA-1,8-L	Jiene						

## Personal Protective Equipment

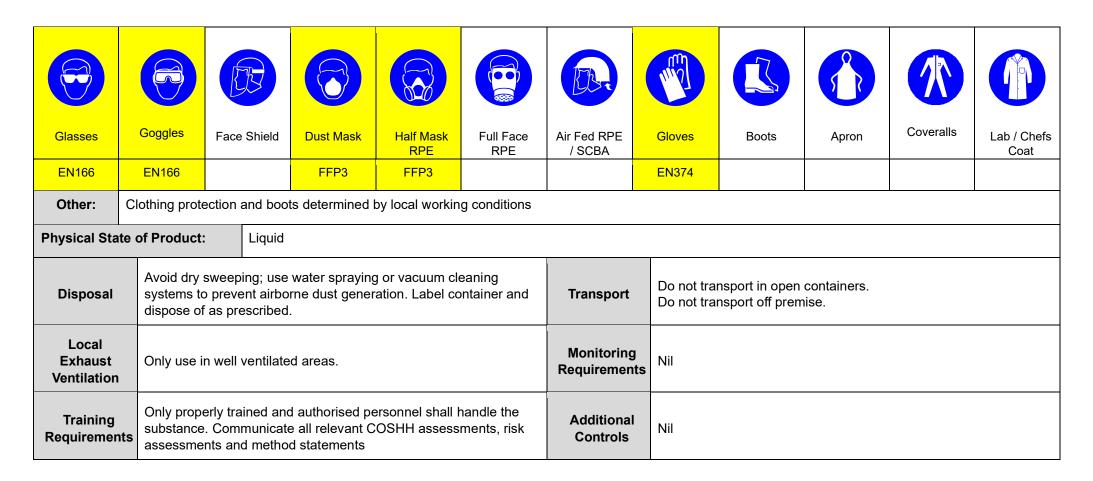

### Part 4 - Completion

Additional Comments			

Endorsed By:	Alan Sharman	Position:	H&S Advisor	Date:	October 2023
Reviewed By:		Position:		Date:	
Reviewed By:		Position:		Date:	
Reviewed By:		Position:		Date:	
Reviewed By:		Position:		Date:	